



Coveroll Wall Roller

WARNING

FOR YOUR SAFETY – This product must be installed and serviced by a qualified pool professional in accordance with applicable national, state, and local codes and standards. Before installing this product, read and follow all warning notices and instructions that accompany this product. Failure to follow warning notices and instructions may result in property damage, personal injury, or death. Improper installation and/or operation may void the warranty and may result in hazards which could cause serious injury or property damage. This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or those lacking experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure they do not play with the appliance.



ATTENTION INSTALLER – This manual contains important information about the installation, operation and safe use of this product. This information should be given to the owner/operator of this equipment.

Section 1. Care & Maintenance Guide

Your roller requires care and maintenance to achieve maximum life and to uphold the warranty. The following are recommended maintenance steps:

- Do not store chemicals close to rollers.
- Keep all castor wheels clean and free of debris (e.g. hair).
- Rollers can be cleaned down with a cloth and if in an indoor environment sprayed with a clear anti-corrosive spray.
- Do not stand or sit on the roller tube.
- Where rollers are installed or stored indoors, be sure to keep the area well-ventilated.

Section 2. Operation Guide

Putting the cover on the pool

- Remove security strap from around the cover and clip around the leg of the roller for safe keeping.
- Loosen the T-bolt to release roller.
- Pick up the haul cord and walk to the other end of the pool.
- Pull the cover onto the pool.
- Put the haul cord on top of the end of the cover.

Removing the cover from the pool

- Wind the crank handle to begin winding up the cover. Note if there is a hinge section you need to fold the hinged piece onto the main cover and then under roll not over roll
- Once the cover is completely on the roller, tighten the T-bolt to secure the roller.
- Fasten the security strap around the cover to stop it from unwinding/self shedding.

NOTE: In cases of strong winds and inclement weather please ensure your cover is off the pool and secured on the roller.

Section 3. Tools Required



HAMMER DRILL
Brick/Concrete
12mm masonry
drill bit



DRILL
Timber | 10mm
drill bit



17mm SOCKET
SPANNER



PENCIL/TEXTA



HAMMER



TAPE MEASURE



ANTI-SEIZE
Nickle based
lubricant



SPIRIT LEVEL



PROTECTIVE
BACKING
Timber or Plastic



THREADLOCKER
Medium strength
ie Loctite®



SUITABLE PPE
PPE should be worn
while assembling/
installing product

Section 4. Supplied Parts



2 X END FRAMES/
WALL BRACKET



1 X CRANK
HANDLE
WITH M10 SCREW



1 X ROLLER TUBE

4.1 Fixing Kit Options

4.1.1 Masonry Fixing Kit - 66017



4 X SLEEVE
ANCHORS 12X60mm
WITH M10 THREAD
Concrete/Brick



4 X M10
DOME NUTS
Concrete/Brick

4.1.2 Timber Fixing Kit - 66018




4 X M12 COACH BOLTS
Timber

IMPORTANT

DISCLAIMER REGARDING WALL TYPES

Ensure the wall (installation location) is structurally capable of accommodating the weight of roller plus cover and sustain the dynamic loads during use. If unsure consult a structural engineer to sign off the structure prior to roller installation. Hollow block walls should be thru-bolted, using a plate at rear to disperse clamping force across multiple blocks. Alternative to use chemset studs and sleeve under structural engineer's approval. Hollow brick walls (i.e 3 or 10-hole red brick) can be fixed using chemset studs and ramset sleeves. When fixing into timber walls, it is critical that all fixings are directly inserted into studs.

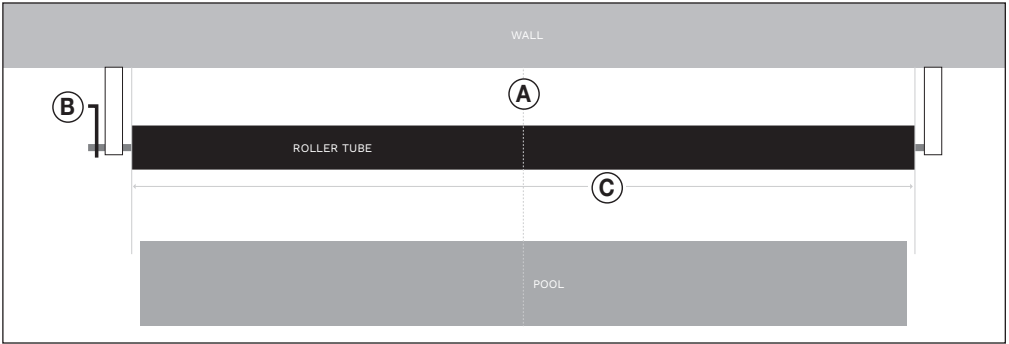

Section 5. Roller location setup

1. **Find Pool Centre:** Measure the entire width of the pool at the end the roller will be installed. Find the centre of this width and mark on the wall (A). This central mark will be your reference point for aligning the roller.
2. **Determine the Roller's Orientation:** Decide which side of the roller you want the handle to be. The bracket with the t-bolt is where the winder will be positioned (B).
3. **Find Bracket Bolt Line:** Measure the length of the roller (C) and divide by two. Then add 38mm (D) to the halved length.
4. **Mark Bracket Bolt Line:** From the center point marked on the wall (A), measure outwards to each side using the length derived in step 3. Mark these points for the bolt line.
5. **Establish Roller Height:** Choose a suitable height for the roller on the wall, ensuring it is convenient for operation.


- (A) Centre Point
- (B) Roller Handle
- (C) Roller Tube Length
- (D) 38mm - Outside Bung To Bracket Centre
- (E) 70mm - Bracket Width



Section 6. Installing the first bracket

6.1 Brick/Concrete wall (option 1)

6. **Position the First Wall Bracket:** Place the first bracket against the wall. Align the centre of the bracket/bolt line of bracket with the marking made in previous steps. Mark through holes for drilling. (A)
7. **Drill Holes for Anchors:** Using a hammer drill equipped with a 12mm masonry drill bit, drill the top hole at the marked location to the suitable depth. (B)
8. **Prepare Sleeve Anchors:** Apply small amount of anti seize to the sleeve anchors to ensure smooth installation. (C)
9. **Secure the Bracket:** Place the bracket over the drilled holes. Insert the sleeve anchors and tap them into place with a hammer. Tighten loosely to allow for adjustment. (D)
10. **Level and Adjust the Bracket:** Use a spirit level to check the bracket's position. Rest protective backing (such as timber off-cut) against the wall and bracket to prevent any damage, then lightly tap with a hammer if necessary to achieve level alignment. Then tighten with a 17mm socket. (E)
11. **Repeat steps for second hole.**
12. **Attach Dome Nuts:** Remove the standard nuts from the bolts and replace them with dome nuts for a secure and finished appearance. (F)

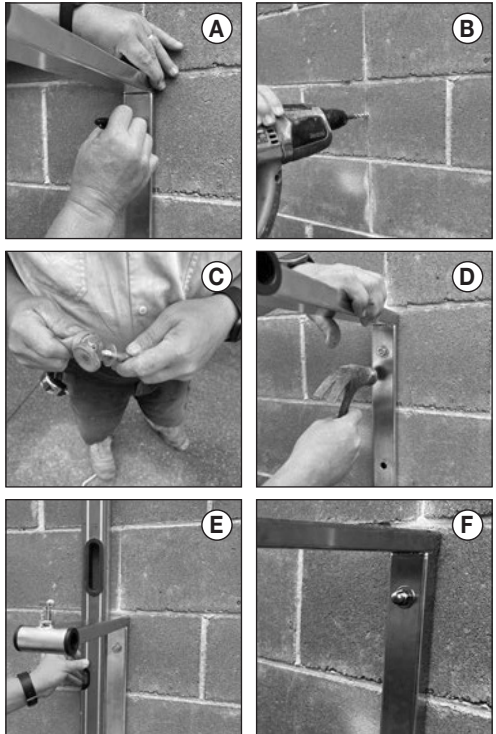





6.2 Timber wall (option 2)

6. **Position the First Wall Bracket:** Place the first bracket against the wall. Align the centre of the bracket/bolt line of bracket with the marking made in previous steps. Mark through holes for drilling.
7. **Drill Pilot Holes for Coach Bolts:** Using a drill equipped with a 10mm drill bit, drill the top pilot hole at the marked location to a suitable depth for the coach bolt.
8. **Secure the Bracket:** Place the bracket over the drilled pilot holes. Insert the coach bolts and tighten loosely to allow for adjustment.
9. **Level and Adjust the Bracket:** Use a spirit level to check the bracket's position. Rest protective backing (such as timber off-cut) against the wall and bracket to prevent any damage, then lightly tap with a hammer if necessary to achieve level alignment. Then tighten with a 17mm socket.
10. **Repeat steps for second hole.**

Section 7. Second bracket and roller install

11. **Positioning the Second Bracket:** Insert the roller shaft into the bracket that has been fixed to the wall. Lift the roller to the approximate position, using a spirit level to ensure it is straight. Check marks on the wall correlate and mark drill locations using the second bracket. (A)
12. **Install the Second Bracket:** Position the second bracket at the marked drill locations. Ensure it is aligned parallel and level with the first bracket. Follow steps 7 to 12 to secure the second bracket. (B) (C) (D)
13. **Attach the Crank Handle:** Apply a small amount threadlocker to the M10 bolt. Insert the crank handle into the hole in the roller shaft. Tighten the bolt onto the flat surface of the crank handle to retain rotational movement. (E)
14. **Final Checks:** Once the roller is fully installed, use a spirit level to check both brackets. Operate the crank handle to ensure the roller moves smoothly. If adjustments are needed due to the brackets being misaligned, slightly loosen fixings and lightly tap them with a hammer to realign. Again ensuring you place protective backing against the wall and bracket first to protect from any damage. (F)


REFER TO THE RELEVANT GUIDES FOR COVER & ATTACHMENT INSTALLATIONS



NOTES

NOTES

WARRANTY REGISTRATION	Record your equipment details here for quick reference: Model No. : _____ Serial No. : _____
	AUSTRALIA WARRANTY: For full warranty terms and conditions and to register your warranty, visit www.sunbather.com.au/warranty and complete your details. ◀ Or scan the QR code to go directly to the registration page.
	NEW ZEALAND WARRANTY: For full warranty terms and conditions and to register your warranty, visit www.sunbather.com.au/warranty and complete your details. ◀ Or scan the QR code to go directly to the registration page.



H0931400